

## Wireless and Wire-free Outdoor Security Camera

*Extreme surveillance solution for continuous wireless operation in any location*

Advanced power management and light control system

Standalone – no cables or wiring

Patented low power design unmatched battery performance


Captures and transmits security images immediately through your mobile cellular network

Manage your cameras from anywhere through the secure MyMi5 platform

# RedEye Extreme



Stainless Steel Weatherproof Housing  
Optional Integrated LED Spotlight

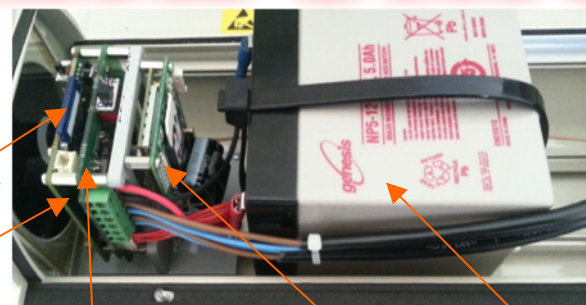

Memory Card  
Camera Board  
Power Management, Solar Regulator, Light Control & Wireless Receiver Module  
3G Cellular Modem  
Sealed Lead Acid (SLA) Battery

<b>Image Type</b>	JPEG compressed, VGA (640 x 480 pixels)
<b>Camera Lens</b>	Monochrome or Colour 2.97mm board lens, AOV: 73.9°(Horizontal) x 54.0°(Vertical) 3.3mm pinhole lens, AOV: 61°(Horizontal) x 47°(Vertical) 3.7mm board lens, AOV: 54°(Horizontal) x 39°(Vertical) 8mm board lens, AOV: 25.5°(Horizontal) x 19.5°(Vertical) 16mm board lens, AOV: 13°(Horizontal) x 10°(Vertical) 25mm board lens, AOV: 8.5°(Horizontal) x 6.5°(Vertical)
<b>Image Sensor Sensitivity</b>	RedEye Extreme – <b>Colour</b> : 3.8 V/Lux-sec RedEye Extreme – <b>Mono</b> : 4.9 V/Lux-sec
<b>Wireless Triggering (optional)</b>	<b>REMOTE Trigger (RRT-01/02)</b> – Passive Infrared (PIR) Transmitter <b>Range</b> : 0-8 m (26') <b>Field of View</b> : 38° horizontal, 22° vertical <b>REMOTE Beam (RRB-01/02)</b> – Photo-Electric Beam Emitter & Transmitter <b>Maximum beam length</b> : 40 m (between Emitter & Transmitter point-to-point units)
<b>Night Lights (optional)</b>	<b>Integrated White LED Spotlight (RXL-02)</b> <b>Range</b> : <30m from camera <b>Light dimensions</b> : 100x75x64mm <b>Weight</b> : 0.9kg <b>Integrated Infrared LED Spotlight (RXL-03)</b> – infrared 940nm <b>Range</b> : <30m from camera <b>Light dimensions</b> : 100x75x64mm <b>Weight</b> : 0.6kg <b>REMOTE NightVision (RRN-01/02)</b> – Standalone battery powered infrared 850nm <b>Range</b> : <15m from the RRN <b>Dimensions</b> : 86x80x55mm <b>Weight</b> : 0.3kg incl battery
<b>External Solar Panel</b>	12VDC, 20W
<b>Approximate Image Capacity</b>	<b>4GB Memory Card</b> – approx 100,000 image capacity
<b>Internal Battery Capacity</b>	Deep Cycle Sealed Lead Acid (SLA) Battery, 12VDC 5Ah
<b>Power Consumption</b>	Camera: Standby: 1.9 mA Running: 100 mA Modem: Sleep: 17uA Idle: 2.5 mA Transmitting: 300 mA
<b>Modem – Cellular Bearer</b>	WCDMA 850/1900/2100 MHz GSM + GPRS 850/900/1800/1900 MHz
<b>Modem Approvals</b>	R&TTE, CE, GCF, FCC, PTCRB, China RTE, AT&T
<b>Case Dimensions &amp; Rating</b>	105 H x 125 W x 410 L mm, UV Resistant, IP54 – Weatherproof Case
<b>Weight</b>	2.9 Kg – Including battery
<b>Operating Temperature</b>	-10°C to +55°C (14°F to 130°F)



JJC SECURITY  
ABN: 69 335 366 956  
Firm License Number: 658-282-805

Telephone: 1300 795 123 Mobile: 0402 714 697  
P.O Box 2350, Gladstone Park, Melbourne, 3043  
E-Mail: enquiries@jjcsecurity.com.au